





### VISTA FLOOR GUIDED

Characterized by their lightness and fine structure, VISTA FLOOR GUIDED panels are guided by two rails (floor & ceiling) when opening and closing the wall. All the panels are interconnected and have a single suspension point that slides through the upper rail.



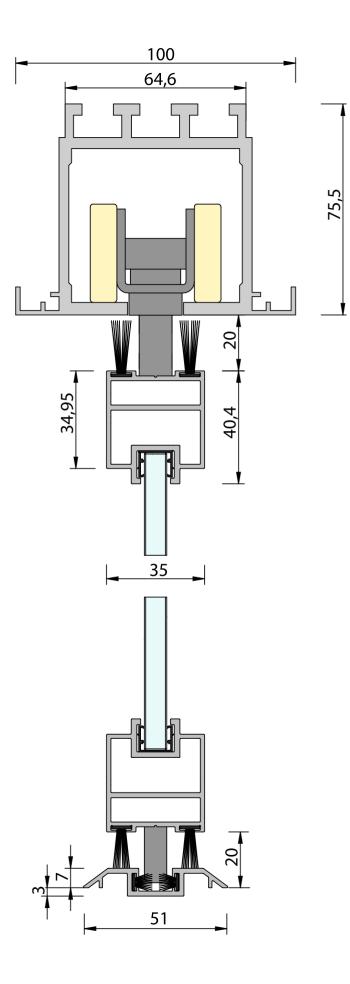

Dimensions	
Thickness (mm)	35
Height (mm)	40
Construction	
Finishes	8 or 10 mm glass
Connecting elements	Aluminum profiles
Operation	
Manual	
Acustic Rating dB (RW)	≈ 35
Density kg/m² 25	(8mm) - 30 (10mm)
Maximum Wall Height (mm	3000
Maximum Panel Width (mr	n) 500-1200
Panel Construction / Frame	e Aluminum
Maximum Opening Width	Adjustable
Key-Points	
Suspended weight by the pivot and guided by the lower rail	
Floor locking system	
Port included in the system	
Hidden hinges	

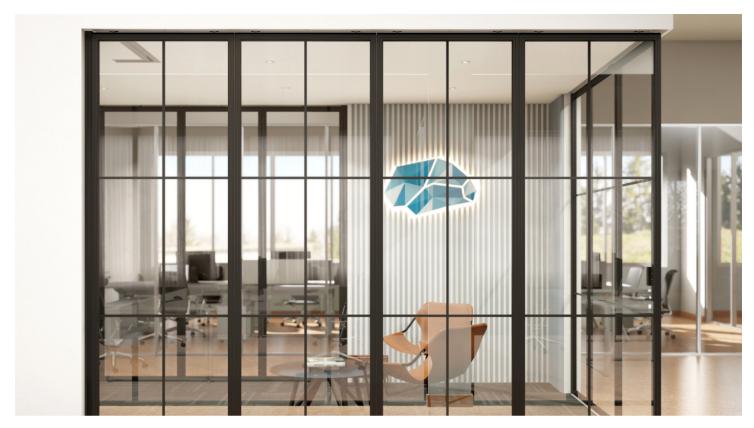




# VISTA OPERABLE WALL

VISTA OPERABLE WALL is characterized by having independent panels with twin suspension. With no floor track, the panels are oriented by the upper rail. For opening and closing the wall, there is also a manual latch system by panel which only requires a small "cup" on the floor. The lightness and fine structure, eases its mobility.



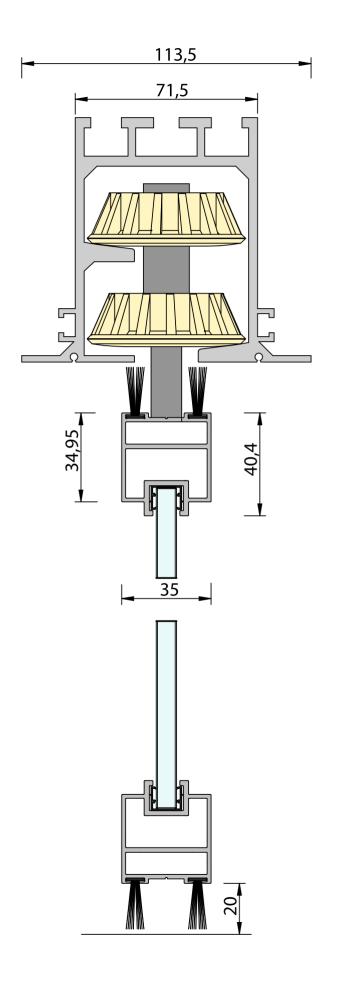

Dimensions	
Thickness (mm)	35
Height (mm)	40
Construction	
Finishes	8 or 10 mm glass
Connecting elements	Aluminum profiles
Operation	
Manual	
Acustic Rating dB (RW)	≈ 35
Density kg/m² 25	5 (8mm) - 30 (10mm)
Maximum Wall Height (m	m) 3000
Maximum Panel Width (n	nm) 500-1200
Panel Construction / Fran	me Aluminum
Maximum Opening Width	. Adjustable
Key-Points	
Independent panels can tayouts and stacking type	
Floor locking system	
Quick opening	
System includes pass do	or
Hidden hinges	













## VISTA SLIDING DOOR

VISTA SLIDING DOOR comes with all the benefits of moveable wall panels, but incorporated in a door. Great aesthetic and functional solution for greater privacy



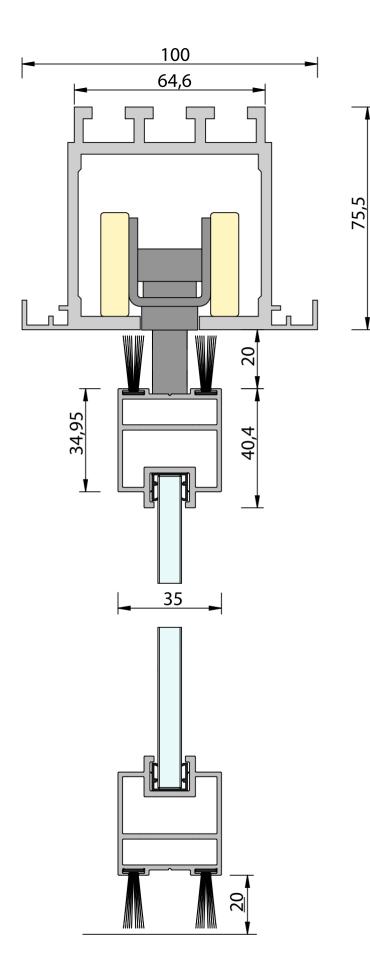

Dimensions	
Thickness (mm)	35
Height (mm)	40
Construction	
Finishes	8 or 10 mm glass
Connecting elements	Aluminum profiles
Operation	
Manual	
Acustic Rating dB (RW)	≈ 35
Density kg/m² 25	(8mm) - 30 (10mm)
Maximum Wall Height (mm	3000
Maximum Panel Width (mn	n) 500-1200
Panel Construction / Frame	e Aluminum
Maximum Opening Width	Adjustable
Key-Points	
Sliding door with reduced thickness	
Weight supported by the bottom rail	
High aesthetic level	

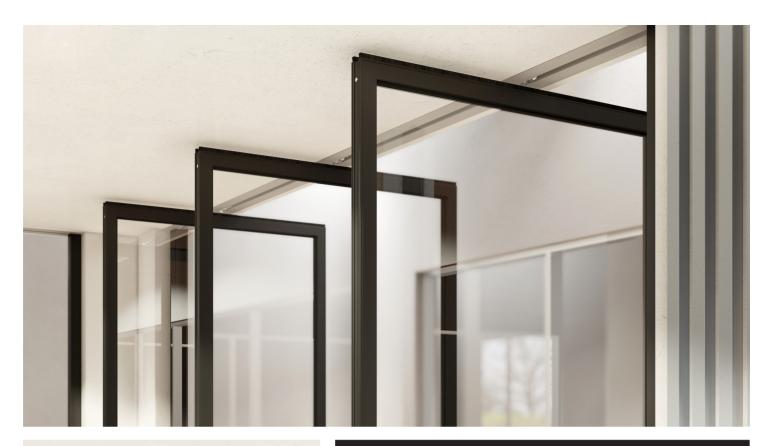




# VISTA PIVOTING WALL

VISTA PIVOTING WALL is characterized by having single suspension point panels, thus allowing greater adaptability to the space when opened. The panels are oriented and supported by the upper rail, with no need for a floor track. They also have a manual panel latch system in which only a small "cup" on the floor is required.



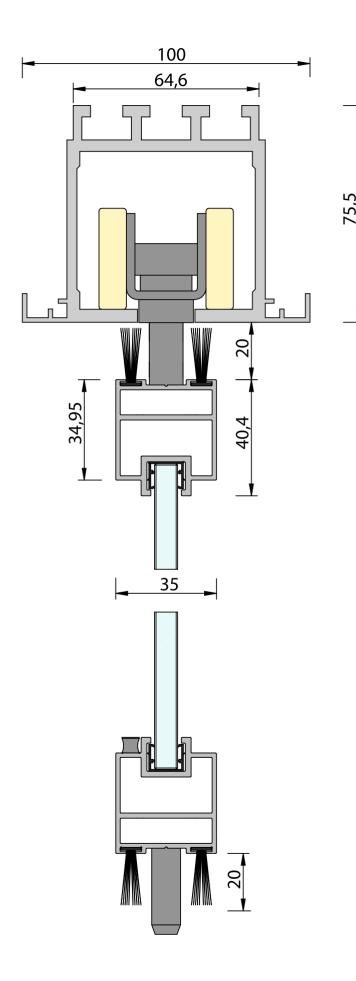


Dimensions	
Thickness (mm)	35
Height (mm)	40
Construction	
Finishes	8 or 10 mm glass
Connecting elements	Aluminum profiles
Operation	
Manual	
Acustic Rating dB (RW)	≈ 35
Density kg/m² 25	(8mm) - 30 (10mm)
Maximum Wall Height (mm	n) 3000
Maximum Panel Width (mr	m) 500-1200
Panel Construction / Frame	e Aluminum
Maximum Opening Width	Adjustable
Key-Points	
Independent panels	
Panels parking	
Centre folding	
Pivoting wall with reduced	thickness
High aesthetic level	

### Stacking Systems

### VISTA - Floor Guided

Celling Track	Monodirectional
Floor Track	Yes







**Centre Folding** 

Side Folding

### VISTA - Operable Wall

Celling Track	Multidirectional
Floor Track	No








VISTA - Sliding Door


Celling Track	Monodirectional
Floor Track	No



### VISTA - Pivoting Wall

Celling Track	Monodirectional
Floor Track	No





### **Technical Details**



### Vista Door

VISTA walls may include a single / double door or, ultimately, a hinged door. The single door is the closure of a continuity of the system and can be double if two walls are in the middle, adding the possibility of having a fixed door on the opposite side of the system starting.



### Hidden Hinges

VISTA hinges are hidden. Thus, when the wall is closed, there is no element that contradicts the continuity of the wall. It is one of the highlighted aesthetic points in the development of the wall.



### Floor Track

The floor track facilitates the opening and closing of the partition. It is a discreet piece and prepared to be adapted to the floor, with or without finishing.



### Floor Locking System

VISTA wall can work suspended on a rail fixed to the ceiling, running free at the bottom with no need for floor guidance. To open and close the partition, a discreet manual locking system was created.

### **Finishes**

### Glass



(8 or 10 mm)

### Lacquering



RAL 9005 - JET BLACK



RAL 9010 - PUF WHITE

### Special Lacquering



NATURAL NEBRASKA OAK



NATURAL DIJON WALNUT














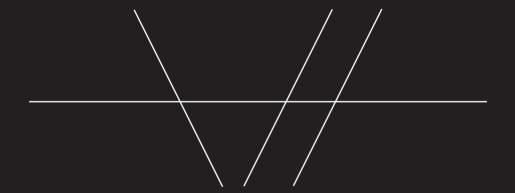



+351 244 032 910

www.pcts.pt geral@pcts.pt

R. de Moçambique, N° 29, Ordem, 2430-379 Marinha Grande, Portugal